

INDUSTRIAL VALVES

Voelkel-Armaturen GmbH & Co. KG



Gate - Globe - Valve API 602

Bolted / Welded Bonnet



ANSI	
Size	1/2" - 2"
Rating (lbs)	150, 300, 600, 800, 900, 1500, 2500
Ends	NPT, SW, BW, RF, RJ
Material	A105, LF2 F1, F5, F11, F22 F304, F316, F321

DIN	
Size	DN15 - DN50
Rating	PN 10, 16, 25, 40, 63, 100, 160, 250
Ends	BSP, SW, BW, Flanged
Material	C22.8, TSTE 355 16Mo3, 13CrMo4-5, 10CrMo9-10 1.4301, 1.4401, 1.4541, 1.4571

SPECIAL	
	Antistatic Device
	Globe Needle Type
	Locking Device
	Monel Stem
	PTFE Packing
	Spring Loaded Packing
	TA-Luft
	Position Indicator
	Protection Stem

Gate - Globe - Valve API 600

Bolted Bonnet



ANSI	
Size	2-1/2" - 30"
Rating (lbs)	150, 300, 600, 800, 900, 1500
Ends	SW, BW, RF, RJ
Material	A216 WCB, A352 LCB A217 WC1, WC6, WC9 CF8, CF8M

DIN	
Size	DN65 - DN600
Rating	PN 10, 16, 25, 40, 63, 100, 160
Ends	SW, BW, Flanged
Material	GS-C25, TSTE 355 GS-22Mo4, GS-17CrMo55 1.4308, 1.4408

SPECIAL	
	Antistatic Device
	Globe Needle Type
	Locking Device
	Monel Stem
	PTFE Packing
	Spring Loaded Packing
	TA-Luft
	Position Indicator
	Protection Stem

Ball Valve

Short Pattern / Long Pattern



ANSI


Size	1/2" - 12"
Rating (lbs)	150, 300, 600, 800, 900, 1500, 2500
Ends	NPT, SW, BW, RF, RJ
Material	A105, A216 WCB, LF2 F304, F316, F321, CF8, CF8M

DIN

Size	DN15 - DN300
Rating	PN 10, 16, 25, 40, 63, 100, 160, 250
Ends	BSP, SW, BW, Flanged
Material	C22.8, GS-C25, TSTE 355 1.4301, 1.4401, 1.4408, 1.4541, 1.4571

SPECIAL

- Antistatic Device
- Actuator
- Fire Safe
- Locking Device

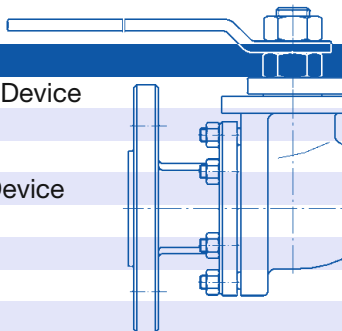

DUO - Check - Valve

Wafer Typ



ANSI


Size	2" - 40"
Rating (lbs)	150, 300, 600
Seat	BUNA, VITON, METAL/METAL
Material	Cast Iron, Ductil Iron A216 WCB, CF8M

DIN

Size	DN50 - DN1000
Rating	PN10, 16, 25, 40, 63, 100
Seat	BUNA, VITON, METAL/METAL
Material	GG25, GGG40, GS-C25, 1.4408

SPECIAL

- Special Spring
 - less pressure drop
 - up flow
 - down flow
- Position Indicator
 - plates closed

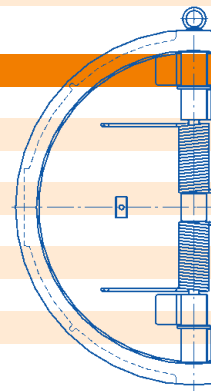

Butterfly - Valve

Wafer Typ / Lug Typ



ANSI

Size	1-1/2" - 40"
Rating (lbs)	150, 300
Sealing	BUNA, EPDM, VITON, PTFE
Material	Cast Iron, Ductil Iron A216 WCB, CF8M

DIN

Size	DN40 - DN1000
Rating	PN10, 16
Sealing	BUNA, EPDM, VITON, PTFE
Material	GG25, GGG40, GS-C25, 1.4408

SPECIAL

- Actuator
- Gear Box
- High-Performance-Valve
 - Metal Sealing
 - PTFE Sealing

